


Delta PT® 07HP




English	Français	Deutsch	Italiano	Español
Pan head Torx®	Tête cylindrique bombée large Torx®	Flachkopf Torx®	Testa cilindrica Torx®	Cabeza alomada Torx®
Steel low carbon Hardness: 320 - 380 HV10 or Steel case hardened Hardness: Surface: 500 - 650 HV0,3 Core: 270 - 390 HV10	Acier bas carbone Dureté: 320 - 380 HV10 ou Acier cémenté Dureté: Superficielle: > 450 HV0,3 à coeur: 290 à 370 HV10	Stahl Härte: 320 - 380 HV10 oder Stahl einsatzgehärtet Härte: Oberfläche: > 450 HV0,3 Kern: 290 bis 370 HV10	Acciaio al carbonio Durezza: 320 - 380 HV10 o Acciaio cementato Durezza: Surface: > 450 HV0,3 Core: 290 a 370 HV10	Acero Dureza: 320 - 380 HV10 o Acero cementado Dureza: Surface: > 450 HV0,3 Core: 290 a 370 HV10
Zinc alkaline clear ¹⁾ or Zinc -nickel alkaline clear ²⁾	Zinc alcalin claire ¹⁾ ou Zinc-nickel alcalin claire ²⁾	Zink alkalisch transparent ¹⁾ oder Zink-Nickel alkalisch transparent ²⁾	Zinco alcalino chiaro ¹⁾ o Zinco-Nichel alcalino chiaro ²⁾	Zincado y pasivado claro ¹⁾ o Niquelado ²⁾



¹⁾ 96 h / ²⁾ 720 h **

≡ EJOT WN5452

** : to red rust / à la rouille rouge / bis Rotrost / alla ruggine rossa / al óxido rojo (ASTM B117)

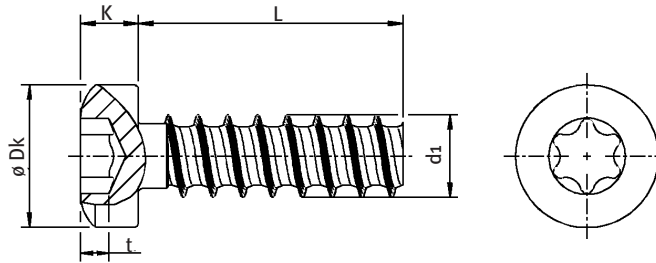

ø	ø d1	Pitch / Pas / Steigung / Passo / Paso	ø Dk	K	Torx®	t	L	Part No/ref
2.0	2.00 - 2.08	0.78	3.20 - 3.50	1.48 - 1.72	T6	0.65 - 0.85	4 ±0.375	07HP2000402
							6 ±0.375	07HP2000602
							8 ±0.45	07HP2000802
							10 ±0.45	07HP2001002
							12 ±0.55	07HP2001202
							16 ±0.55	07HP2001602
							18 ±0.55	07HP2001802
2.5	2.50 - 2.60	0.95	4.10 - 4.40	1.78 - 2.02	T8	0.80 - 1.00	6 ±0.375	07HP2500602
							8 ±0.45	07HP2500802
							10 ±0.45	07HP2501002
							12 ±0.55	07HP2501202
							16 ±0.55	07HP2501602
							18 ±0.55	07HP2501802
20 ±0.65	07HP2502002							

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Delta PT® 07HP

∅	∅ d1	Pitch / Pas / Steigung / Passo / Paso	∅ Dk	K	Torx®	t	L	Part No/ref
3.0	3.00 - 3.10	1.12	5.00 - 5.30	2.18 - 2.42	T10	1.00 - 1.30	6 ±0.375	07HP3000602
							8 ±0.45	07HP3000802
							10 ±0.45	07HP3001002
							12 ±0.55	07HP3001202
							16 ±0.55	07HP3001602
							18 ±0.55	07HP3001802
							20 ±0.65	07HP3002002
							25 ±0.65	07HP3002502
3.5	3.50 - 3.60	1.29	5.74 - 6.10	2.58 - 2.82	T15	1.10 - 1.50	8 ±0.45	07HP3500802
							10 ±0.45	07HP3501002
							12 ±0.55	07HP3501202
							16 ±0.55	07HP3501602
							18 ±0.55	07HP3501802
							20 ±0.65	07HP3502002
							25 ±0.65	07HP3502502
							30 ±0.65	07HP3503002
4.0	4.00 - 4.10	1.46	6.64 - 7.00	2.95 - 3.25	T20	1.40 - 1.80	10 ±0.45	07HP4001002
							12 ±0.55	07HP4001202
							16 ±0.55	07HP4001602
							18 ±0.55	07HP4001802
							20 ±0.65	07HP4002002
							25 ±0.65	07HP4002502
							30 ±0.65	07HP4003002
							35 ±0.80	07HP4003502
4.5	4.50 - 4.60	1.63	7.14 - 7.50	3.05 - 3.35	T20	1.40 - 1.80	10 ±0.45	07HP4501002
							12 ±0.55	07HP4501202
							16 ±0.55	07HP4501602
							18 ±0.55	07HP4501802
							20 ±0.65	07HP4502002
							25 ±0.65	07HP4502502
							30 ±0.65	07HP4503002
							35 ±0.80	07HP4503502
5.0	5.00 - 5.15	1.80	8.44 - 8.80	3.35 - 3.65	T25	1.50 - 1.90	10 ±0.45	07HP5001002
							12 ±0.55	07HP5001202
							16 ±0.55	07HP5001602
							18 ±0.55	07HP5001802
							20 ±0.65	07HP5002002
							25 ±0.65	07HP5002502
							30 ±0.65	07HP5003002
							35 ±0.80	07HP5003502
							40 ±0.80	07HP5004002
							45 ±0.80	07HP5004502

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Delta PT® 07HP


∅	∅ d1	Pitch / Pas / Steigung / Passo / Paso	∅ Dk	K	Torx®	t	L	Part No/ref
6.0	6.00 - 6.15	2.14	10.07 - 10.50	4.05 - 4.35	T30	1.90 - 2.40	12 ±0.55	07HP6001202
							16 ±0.55	07HP6001602
							18 ±0.55	07HP6001802
							20 ±0.65	07HP6002002
							25 ±0.65	07HP6002502
							30 ±0.65	07HP6003002
							35 ±0.80	07HP6003502
							40 ±0.80	07HP6004002
							45 ±0.80	07HP6004502
8.0	8.00 - 8.18	2.82	13.67 - 14.10	5.45 - 5.75	T40	2.60 - 3.20	16 ±0.55	07HP8001602
							18 ±0.55	07HP8001802
							20 ±0.65	07HP8002002
							25 ±0.65	07HP8002502
							30 ±0.65	07HP8003002
							35 ±0.80	07HP8003502
							40 ±0.80	07HP8004002
							45 ±0.80	07HP8004502
							50 ±0.80	07HP8005002
60 ±0.95	07HP8006002							

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Quality level / Niveau qualité / Qualitätsniveau / Livello qualità / Nivel de calidad: 150 ppm

Highlighted part numbers are non standard, non in stock - Références surlignées non standard et non tenues en stock -
Markierte Artikel-Nummern sind kein Standard, keine Lagerware - I codici evidenziati non sono standard, non sono a stock -
Referencias no estándar, generalmente no en stock

Finishes / finition / Oberflächen / superficie / superficie

Type	Description / description / Beschreibung / descrizione / descripción	C16	 3)	Code ⁴⁾
Standard	Zinc alkaline 8 µm mini clear / Zinc alcalin 8µm mini passivation claire / Zink alkalisch 8µm min. transparent / Znco alcalino 8µm min. passivazione chiara / Zincado y pasivado claro min. 8 µm	✓	96 h	AD
Optional	Zinc alkaline 8 µm mini clear / Zinc alcalin 8µm mini passivation claire / Zink alkalisch 8µm min. transparent / Znco alcalino 8µm min. passivazione chiara / Zincado y pasivado claro min. 8 µm	✓	400 h	AF
Optional	Zinc-nickel 12 -15 % clear / Zinc-nickel 12 -15 % passivation claire / Zink-Nickel 12 -15 % transparent / Znco Nickel 12 -15 % passivazione chiara / Niquelado claro 12 -15 %	✓	720 h	BC
Optional	Zinc-nickel 12 -15 % black / Zinc-nickel 12 -15 % passivation noir / Zink-Nickel 12 -15 % schwarz / Znco Nickel 12 -15 % passivazione nera / Niquelado negro 12 -15 %	✓	720 h	BD

3) to red rust / à la rouille rouge / bis Rotrost / alla ruggine rossa / al óxido rojo

4) add code to the part number / ajoutez le code à la référence / fügen Sie den Code zur Artikel-Nummer hinzu / aggiungere il codice alla referenza / añadir numeración a la referencia