


# Delta PT<sup>®</sup> 07LQ




English	Français	Deutsch	Italiano	Español
Round large head Torx Plus <sup>®</sup>	Tête ronde large Torx Plus <sup>®</sup>	Rundkopf groß Torx Plus <sup>®</sup>	Testa ½ Tonda con finta rondella Torx Plus <sup>®</sup>	Cabeza alomada con ala Torx Plus <sup>®</sup>
Steel low carbon Hardness: 320 - 380 HV10 or Steel case hardened Hardness: Surface: 500 - 650 HV0,3 Core: 270 - 390 HV10	Acier bas carbone Dureté: 320 - 380 HV10 ou Acier cémenté Dureté: Superficielle: > 450 HV0,3 à coeur: 290 à 370 HV10	Stahl Härte: 320 - 380 HV10 oder Stahl einsatzgehärtet Härte: Oberfläche: > 450 HV0,3 Kern: 290 bis 370 HV10	Acciaio al carbonio Durezza: 320 - 380 HV10 o Acciaio cementato Durezza: Surface: > 450 HV0,3 Core: 290 a 370 HV10	Acero Dureza: 320 - 380 HV10 o Acero cementado Dureza: Surface: > 450 HV0,3 Core: 290 a 370 HV10
Zinc alkaline clear <sup>1)</sup> or Zinc -nickel alkaline clear <sup>2)</sup>	Zinc alcalin claire <sup>1)</sup> ou Zinc-nickel alcalin claire <sup>2)</sup>	Zink alkalisch transparent <sup>1)</sup> oder Zink-Nickel alkalisch transparent <sup>2)</sup>	Zinco alcalino chiaro <sup>1)</sup> o Zinco-Nichel alcalino chiaro <sup>2)</sup>	Zincado y pasivado claro <sup>1)</sup> o Niquelado <sup>2)</sup>



<sup>1)</sup> 96 h / <sup>2)</sup> 720 h \*\*

≡ EJOT WN5451 & \*Ford WD313

\*\* : to red rust / à la rouille rouge / bis Rotrost / alla ruggine rossa / al óxido rojo (ASTM B117)

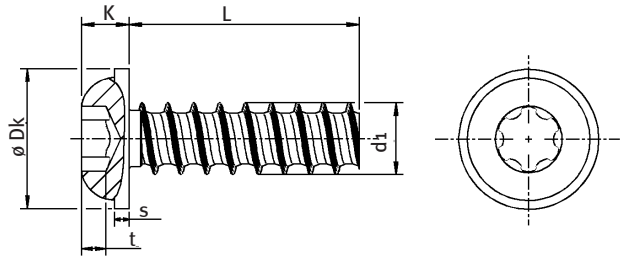

Ø	Ø d1	Pitch / Pas/ Steigung / Passo / Paso	Ø Dk	K	s ± 0.1	Torx Plus <sup>®</sup>	t	L	Part No/ref
2.0	2.00 - 2.08	0.78	4.02- 4.50	1.48 - 1.72	0.60	6IP	0.65 - 0.85	4 ± 0.375	<b>07LQ2000402</b>
								6 ± 0.375	<b>07LQ2000602</b>
								8 ± 0.45	<b>07LQ2000802</b>
								10 ± 0.45	<b>07LQ2001002</b>
								12 ± 0.55	<b>07LQ2001202</b>
								16 ± 0.55	<b>07LQ2001602</b>
								18 ± 0.55	<b>07LQ2001802</b>
20 ± 0.65	<b>07LQ2002002</b>								
2.5	2.50 - 2.60	0.95	5.02 - 5.50	1.78 - 2.02	0.70	8IP	0.80 - 1.00	6 ± 0.375	<b>07LQ2500602</b>
								8 ± 0.45	<b>07LQ2500802</b>
								10 ± 0.45	<b>07LQ2501002</b>
								12 ± 0.55	<b>07LQ2501202</b>
								16 ± 0.55	<b>07LQ2501602</b>
								18 ± 0.55	<b>07LQ2501802</b>
20 ± 0.65	<b>07LQ2502002</b>								

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

# Delta PT® 07LQ

∅	∅ d1	Pitch / Pas/ Steigung / Passo / Paso	∅ Dk	K	s ± 0.1	Torx Plus®	t	L	Part No/ref
3.0*	3.00 - 3.10	1.12	5.92 - 6.50	2.18 - 2.42	0.80	10IP	1.00 - 1.30	6 ±0.375	<b>07LQ3000602</b>
								8 ±0.45	<b>07LQ3000802</b>
								10 ±0.45	<b>07LQ3001002</b>
								12 ±0.55	<b>07LQ3001202</b>
								16 ±0.55	<b>07LQ3001602</b>
								18 ±0.55	<b>07LQ3001802</b>
								20 ±0.65	<b>07LQ3002002</b>
								25 ±0.65	<b>07LQ3002502</b>
3.5	3.50 - 3.60	1.29	6.92 - 7.50	2.58 - 2.82	0.9	15IP	1.10 - 1.50	8 ±0.45	<b>07LQ3500802</b>
								10 ±0.45	<b>07LQ3501002</b>
								12 ±0.55	<b>07LQ3501202</b>
								16 ±0.55	<b>07LQ3501602</b>
								18 ±0.55	<b>07LQ3501802</b>
								20 ±0.65	<b>07LQ3502002</b>
								25 ±0.65	<b>07LQ3502502</b>
								30 ±0.65	<b>07LQ3503002</b>
4.0*	4.00 - 4.10	1.46	8.42 - 9.00	2.95 - 3.25	1.0	20IP	1.40 - 1.80	10 ±0.45	<b>07LQ4001002</b>
								12 ±0.55	<b>07LQ4001202</b>
								16 ±0.55	<b>07LQ4001602</b>
								18 ±0.55	<b>07LQ4001802</b>
								20 ±0.65	<b>07LQ4002002</b>
								25 ±0.65	<b>07LQ4002502</b>
								30 ±0.65	<b>07LQ4003002</b>
4.5	4.50 - 4.60	1.63	9.42 - 10.00	3.05 - 3.35	1.10	20IP	1.40 - 1.80	10 ±0.45	<b>07LQ4501002</b>
								12 ±0.55	<b>07LQ4501202</b>
								16 ±0.55	<b>07LQ4501602</b>
								18 ±0.55	<b>07LQ4501802</b>
								20 ±0.65	<b>07LQ4502002</b>
								25 ±0.65	<b>07LQ4502502</b>
								30 ±0.65	<b>07LQ4503002</b>
								35 ±0.80	<b>07LQ4503502</b>
5.0*	5.00 - 5.15	1.80	10.30 - 11.00	3.35 - 3.65	1.20	25IP	1.50 - 1.90	10 ±0.45	<b>07LQ5001002</b>
								12 ±0.55	<b>07LQ5001202</b>
								16 ±0.55	<b>07LQ5001602</b>
								18 ±0.55	<b>07LQ5001802</b>
								20 ±0.65	<b>07LQ5002002</b>
								25 ±0.65	<b>07LQ5002502</b>
								30 ±0.65	<b>07LQ5003002</b>
								35 ±0.80	<b>07LQ5003502</b>
								40 ±0.80	<b>07LQ5004002</b>
45 ±0.80	<b>07LQ5004502</b>								

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros



# Delta PT® 07LQ


∅	∅ d1	Pitch / Pas/ Steigung / Passo / Paso	∅ Dk	K	s ± 0.1	Torx Plus®	t	L	Part No/ref
6.0*	6.00 - 6.15	2.14	12.80 - 13.50	4.05 - 4.35	1.40	30IP	1.90 - 2.40	12 ±0.55	<b>07LQ6001202</b>
								16 ±0.55	<b>07LQ6001602</b>
								18 ±0.55	<b>07LQ6001802</b>
								20 ±0.65	<b>07LQ6002002</b>
								25 ±0.65	<b>07LQ6002502</b>
								30 ±0.65	<b>07LQ6003002</b>
								35 ±0.80	<b>07LQ6003502</b>
								40 ±0.80	<b>07LQ6004002</b>
8.0*	8.00 - 8.18	2.82	17.30 - 18.00	5.45 - 5.75	1.80	40IP	2.60 - 3.20	16 ±0.55	<b>07LQ8001602</b>
								18 ±0.55	<b>07LQ8001802</b>
								20 ±0.65	<b>07LQ8002002</b>
								25 ±0.65	<b>07LQ8002502</b>
								30 ±0.65	<b>07LQ8003002</b>
								35 ±0.80	<b>07LQ8003502</b>
								40 ±0.80	<b>07LQ8004002</b>
								45 ±0.80	<b>07LQ8004502</b>
							50 ±0.80	<b>07LQ8005002</b>	
							60 ±0.95	<b>07LQ8006002</b>	

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Quality level / Niveau qualité / Qualitätsniveau / Livello qualità / Nivel de calidad: 150 ppm

Highlighted part numbers are non standard, non in stock - Références surlignées non standard et non tenues en stock -  
Markierte Artikel-Nummern sind kein Standard, keine Lagerware - I codici evidenziati non sono standard, non sono a stock -  
Referencias no estándar, generalmente no en stock

## Finishes / finition / Oberflächen / superficie / superficie

Type	Description / description / Beschreibung / descrizione / descripción	<del>Cp6</del>	 3)	Code <sup>4)</sup>
Standard	Zinc alkaline 8 µm mini clear / Zinc alcalin 8µm mini passivation claire / Zink alkalisch 8µm min. transparent / Zinco alcalino 8µm min. passivazione chiara / Zincado y pasivado claro min. 8 µm	✓	96 h	AD
Optional	Zinc alkaline 8 µm mini clear / Zinc alcalin 8µm mini passivation claire / Zink alkalisch 8µm min. transparent / Zinco alcalino 8µm min. passivazione chiara / Zincado y pasivado claro min. 8 µm	✓	400 h	AF
Optional	Zinc-nickel 12 -15 % clear / Zinc-nickel 12 -15 % passivation claire / Zink-Nickel 12 -15 % transparent / Zinco Nichel 12 -15 % passivazione chiara / Niquelado claro 12 -15 %	✓	720 h	BC
Optional	Zinc-nickel 12 -15 % black / Zinc-nickel 12 -15 % passivation noir / Zink-Nickel 12 -15 % schwarz / Zinco Nichel 12 -15 % passivazione nera / Niquelado negro 12 -15 %	✓	720 h	BD

3) to red rust / à la rouille rouge / bis Rotrost / alla ruggine rossa / al óxido rojo

4) add code to the part number / ajoutez le code à la référence / fügen Sie den Code zur Artikel-Nummer hinzu / aggiungere il codice alla referenza / añadir numeración a la referencia