



Conical Washers



English	Français	Deutsch	Italiano	Español
Steel C60S to C75S Natural	Acier C60S à C75S Brut	Stahl C60S bis C75S Blank	Acciaio C60S a C75S senza trattamento superficiale	Acero C60S a C75S Natural
Hardness: 420 to 510 Hv	Dureté: 420 à 510 Hv	Härte: 420 bis 510 Hv	Durezza: 420 a 510 Hv	Dureza: 420 a 510 Hv

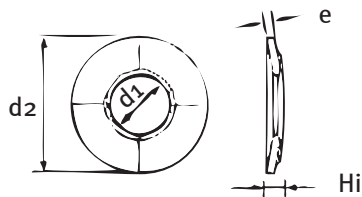


Standard: CL NFE 25 510

screw / vis / Schraube / vite / tornillo	ø d1	ø d2	e	Hi	Hi	Part No/ref
ø				min.	max.	
Narrow / étroit / schmal / stretta / pequeña						
5	5.3 +0.30	11.0 ±0.35	1.2 ±0.04	1.5	1.8	56 05 03
6	6.4 +0.36	12.0 ±0.35	1.4 ±0.04	1.7	2.0	56 06 28
8	8.4 +0.36	16.0 ±0.35	1.9 ±0.05	2.3	2.6	56 08 29
10	10.5 +0.43	20.0 ±0.42	2.2 ±0.05	2.7	3.1	56 10 11
12	13.0 +0.43	24.0 ±0.42	2.8 ±0.06	3.2	3.6	56 12 08
16	17.0 +0.43	32.0 ±0.50	3.4 ±0.06	3.9	4.3	56 16 22
20	21.0 +0.52	38.0 ±0.50	4.0 ±0.07	4.7	5.1	56 20 04
Medium / moyen / mittel / media / mediana						
5	5.3 +0.30	15.0 ±0.35	1.4 ±0.04	1.8	2.1	56 05 04
6	6.4 +0.36	14.0 ±0.35	1.5 ±0.04	1.9	2.2	56 06 12
8	8.4 +0.36	18.0 ±0.35	2.0 ±0.05	2.4	2.7	56 08 67
10	10.5 +0.43	22.0 ±0.42	2.4 ±0.05	2.9	3.3	56 10 06
12	13.0 +0.43	30.0 ±0.42	3.2 ±0.06	3.8	4.2	56 12 06
16	17.0 +0.43	34.0 ±0.50	4.4 ±0.08	4.7	5.0	56 16 03
Large / large / groß / grande / grande						
6	6.4 +0.36	18.0 ±0.35	1.7 ±0.05	2.1	2.4	56 06 26
8	8.4 +0.36	22.0 ±0.42	2.2 ±0.05	2.6	3.0	56 08 27
10	10.5 +0.43	27.0 ±0.42	2.8 ±0.06	3.3	3.7	56 10 25
16	17.0 +0.43	39.0 ±0.50	3.6 ±0.06	4.3	4.7	56 16 04

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Finishes / finition / Oberflächen / superficie / superficie

Type	Description / description / Beschreibung / descrizione / descripción	Cr6	 2)	Code ³⁾
Standard	Unfinished, lubricated / Brut, huilé / Blank, mit Gleitmittel / Nessuna finitura e lubrificazione / Acabado natural y engrasado	✓	-	00
Optional	Dacromet® 500 A	-	500 h	37

2) to red rust / à la rouille rouge / bis Rotrost / alla ruggine rossa / al óxido rojo

3) add code to the part number / ajoutez le code à la référence / fügen Sie den Code zur Artikel-Nummer hinzu / aggiungere il codice al numero di codice / añadir numeración a la referencia



www.acument.com

© 2008 Acument Intellectual Properties, LLC

Dacromet® is a trademark of Metal Coatings International, Inc.

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy. Your local Acument Global Technologies representative is at your disposal should you need to confirm latest information.